
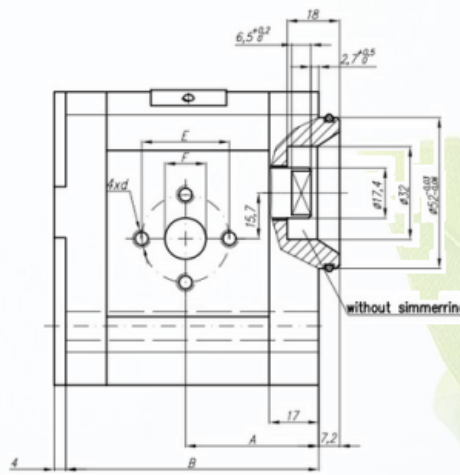


Hydraulic gear pump—Gr. 2

20A(C)..X066

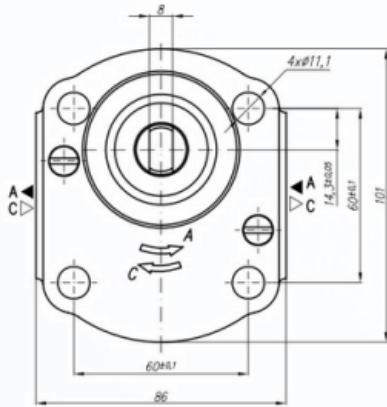

Model	Displacement	Flow		Pressure	Max. Speed	Dimensions							
	cm³ /rev	@ 1500 rpm. L/ min.	@ max. rpm L/min	pnom bar	n rpm	A mm	B mm	Inlet			Outlet		
								E	F	d	E	F	d
20A(C)4.5X066	4.5	6.14	14.33	250	3500	40.2	78	30.2	13.1	M6-6H		13.1	
20A(C)6.3X066	6.3	8.69	20.29	250	3500	42	81						
20A(C)8.2X066	8.2	11.32	26.4	250	3500	43.5	83.9						
20A(C)10X066	10	13.95	32.55	250	3500	45	87	39.7	19	M8-6H	30.2	14.2	M6-6H
20A(C)11X066	11	15.76	36.78	250	3500	46	89.1						
20A(C)12X066	12	16.92	39.48	250	3500	46.6	90.3						
20A(C)14X066	14	19.95	46.55	250	3500	48	93.4						
20A(C)15X066	15	21.6	36	250	2500	49	95						
20A(C)16X066	16	23.04	38.4	250	2500	50	96.6						
20A(C)19X066	19	27.36	45.6	200	2500	52	101.5						
20A(C)22X066	22	31.68	42.24	180	2000	55	106.5						
20A(C)25X066	25	36	48	160	2000	57.2	111.4				39.7	19	M8

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.